

MAKING ONE WORLD !
NOT JUST CONNECTED FIBER BUT WORLD !



IFS-10

ARC FUSION SPLICER

Designed by INNO Instrument, Korea
Made in Korea



IFS-10 Software CD

- * User's Manual
- * PC Software



INNO INSTRUMENT, Inc.
65-3, Sangdaewondong, Jungwongu,
Sungnamsi, Kyeonggido, Korea
462-807
Tel: +82 31 742 8755
Fax: +82 31 742 8799
Email: info@innoinstrument.com
www.innoinstrument.com




The Fiber Master


- 2.2 kg weight (without Battery)
- Harsh weather conditions adaptability
- Friendly smart GUI
- Large Battery capacity : 350 times
- Quick optimize menu
- High precision splicing
- USB master port, easy to upgrade software
- Operate in Bi-directional view

INNO INSTRUMENT, Inc.

The Characteristic of IFS-10

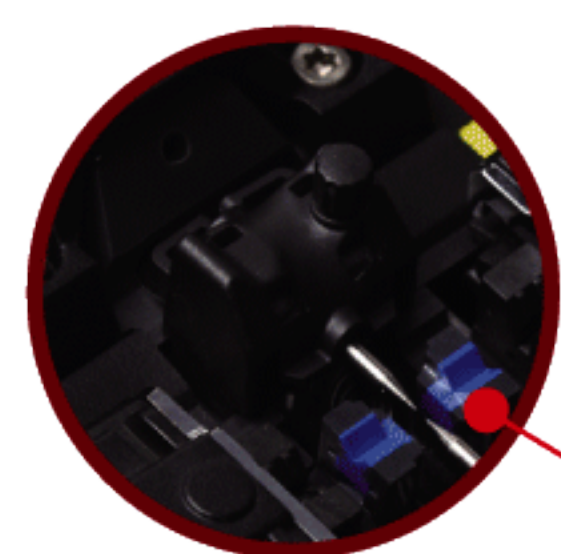


* Easy electrodes exchange

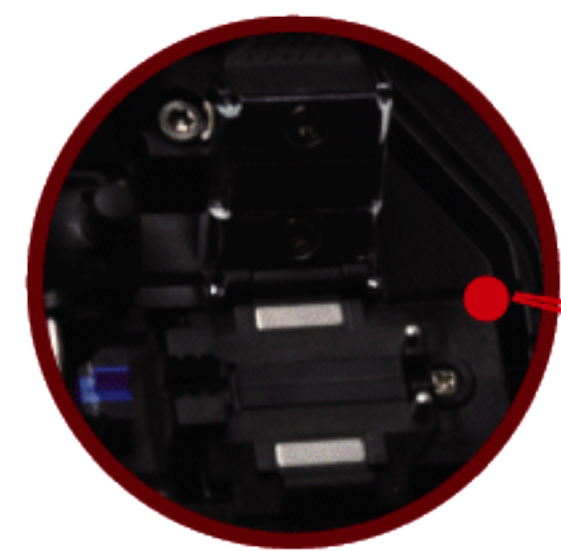

* Easy changeable Holder for Multi-functional Splicing



* Illuminated keypad
Ultra durable more than 1 Million times

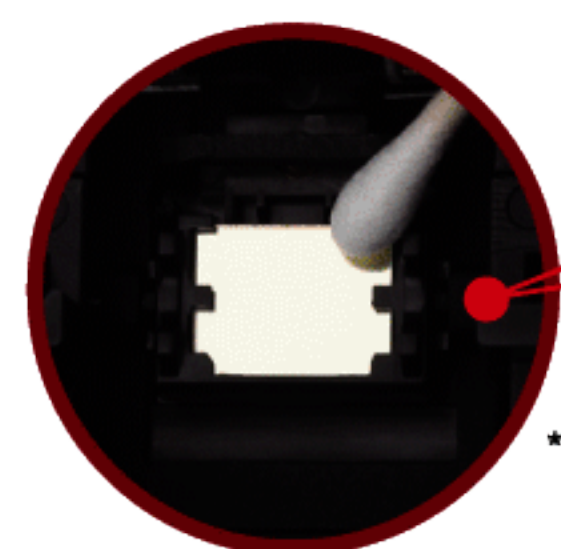

* Easy to clean the mirror
(Anti-fog treated mirror)

*** WATERPROOF, DUSTPROOF, ANTI-SHOCK, WINDPROOF.**

High Altitude works well in harsh weather conditions

* Anti-shock works well in 1 m height drop

Specifications

- 2.2KG (without battery), light and handy, user friendly, easy to operate
- Splicing Method: Core alignment
- Applicable fiber:
SM(ITU-TG.652), MM(ITU-TG.651), DS(ITU-T G.653), NZDS(ITU-T G.655), G657A, G657B
- Average loss: SM(0.02dB), MM(0.01dB), DS(0.04 dB), NZDS(0.04 dB)
- Return loss: >>60 dB
- Splice time: SM fusion average 9s
- Cleaved length: The fiber whose coat-diameter is less than 0.25mm: 8-16mm
The fiber whose coat-diameter is larger than 0.25mm: least 16mm
- Operating environment: elevation 0-5000meter, 95% relative humidity, -10~50°C
- Magnification: XY style: 150 power, X/Y: 300 power
- Monitor: 2CCD camera system, 5 inch LCD
- Splice Programs: 100 user mode, 10 factory preset mode

* Heating oven with zoom window

* Bright LED for night

* Battery:
Typical 350 cycles

* Easy to clean the camera

* Protected by Tempered glass LCD
* Clear core image
* Friendly smart GUI

* Independent clamp motion

- Coating Diameter: 100-1000μm
- Cladding Diameter: 80-150μm
- Splice memory: max 2000 records
- Fiber Display: X/Y or XY, single X.Y
- Pull test: 1.96~2.25N(standard)
- Heating programs: Preset 10 heating modes
- Heating time: FP-03 typical heating time 30s
- Protection sleeve: 60mm,40mm
- Battery: Typical full cycle 350 times
- Power supply: AC 100-240V input or, DC 10-15V
- Data output: USB master device and COM
- Wind protection: The max wind speed 15m/s
- size: 168x145x160mm



Friendly smart GUI



Back

Top

Splice Loss

- ① 0.00dB : 10 times / 100 times
- ② 0.01dB : 70 times / 100 times
- ③ 0.02dB : 20 times / 100 times

Software Back up system



TWO-WAY Multi task Support

Back and front view to match user's work preference.



Standard Package Kit

	No.	Quantity
IFS-10 Splicer	IFS-10	1
AC adapter	ACM-22	1
Battery pack	LBT-20	1
Battery charger	JS-126300-X	1
AC charger	ACC-25	1
Spare-electrodes	E-17	1
Carrying case	NBX-35	1
Cooling tray	CG-22	1
User manual	MB-10XX	1
Fiber Cleaver	VF-78	1

Optional Accessories

- High Precision Cleaver (Optional)
- A fiber coating stripping pliers (Optional)
- Nylon coated wire stripper (Optional)
- Heat Stripper
- External Heater
- Alcohol dispenser
- Thermal protection tube