




Aluminum Outdoor Wall Mount 12 -24 F



Aluminum Outdoor Wall Mount 48 -120 F

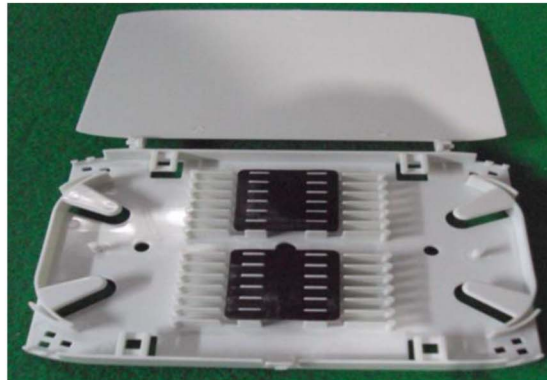

Splice Tray 12 Fiber



Aluminum Outdoor Wall Mount 240 F



For PLC Splitter 1 : 8, 1 : 16 SC

Description

Outdoor Wall-Mount Fiber distribution box made of steel sheet 1.5 mm and powder coated 65 micron. Outdoor Wall Mount is available for 12, 24,48, 60, 72, 120, 240 fiber in the standard beige color., the cable insertion the distributor is pre-punched for PG 21 cable glands optionally, cable can also be insert with connectors. The cable can be held in the preformed holes by a section cable inlet or cable feed through grommet depending on cable diameter.

Features / Benefits

- Provides easy access for connector FC ,SC ,LC, E2000 panel
- FTTx 1 : 2 upto 1 : 64 PLC Splitter
- One door lockable
- IP 65 protected
- 12 splice tray holder
- Panel for adapter can be sliding

Material : Aluminum, Stainless 1.5 mm.

Aluminum sheet 2 mm

Bracket : Steel 2 mm

Size: MM.


12 - 24 PORT	=	120 (D) x 400 (H) x 350 (W)
48 - 60 PORT	=	154 (D) x 420 (H) x 380 (W)
72, 120 PORT	=	160 (D) x 550 (H) x 380 (W)
240 PORT	=	170 (D) x 670 (H) x 430 (W)

SPLICE PROTECTIVE SLEEVE



Splice sleeve for fiber-optic fusion splices can be used to rebuild the primary coating for fiber to provide protection at the fusion joint area.

Structure : Shrinkable sleeve
Stainless steel rod



Generis Specifications :

Description	Typical diameter after heating Φ (mm)	Fusion Tube Φ (mm)	Length of the stainless steel rod l(mm)	Length of Sleeve l(mm)
45 mm	2.5	1.3	40	45
60 mm	2.5	1.3	55	60

Change of temperature	Temperature Cycle Cycles 1 cycle		- 40°C to +85°C 10 cycles 6 hr.
-----------------------	--	--	---------------------------------------

Kimtech Communications Co.,Ltd.

55/280., Ramkhamhaeng 154., Sapansung, Sapansung, Bangkok, 10240.

02-728-2747, 087-929-3178

kimtech@truemail.co.th