

	AccelAir 2	Whisper	Breeze	Air Stream	JetStream	Tornado
Cable Dia.:	1 - 2.5 mm (.04 - .10 in.)	2 - 8.5 mm (.08 - .33 in.)	❖ 1 - 8.5 mm (.04 - .33 in.)	2.5 - 11 mm (.10 - .43 in.)	6 - 20 mm (.23 - .79 in.)	❖ 6 - 32 mm (.24 - 1.26 in.)
Tube Size (OD):	3 - 5 mm (.12 - .20 in.)	4 - 18 mm (.15 - .63 in.)	4 - 18 mm (.15 - .63 in.)	5 - 18 mm (.20 - .71 in.)	12 - 50 mm (.75 - 1.50 in. SDR)	12 - 63 mm (.47 - 2.48 in.)
Cable Speed (Adjustable):	0 - 230 ft/min (0 - 70 m/min)	0 - 300 ft/min (0 - 90 m/min)	0 - 64 ft/min (0 - 50 m/min)	0 - 262 ft/min (0 - 80 m/min)	0 - 280 ft/min (0 - 85 m/min)	0 - 300 ft/min (0 - 90 m/min)
Max Air Pressure/Volume:	220 psi (15 bar) 8.5 cfm (.24 m ³ /min)	220 psi (15 bar) 35 cfm (1 m ³ /min)	220 psi (15 bar) 35 cfm (1 m ³ /min)	220 psi (15 bar) 35 cfm (1 m ³ /min)	❖ 220 psi (15 bar) 150 - 450 cfm (12 m ³ /min)	❖ 175 psi (12 bar) 150 - 450 cfm (4 - 12 m ³ /min)
Drive:	Drive Wheels	Drive Roller	Drive Wheels	Drive Belts	Drive Belts	Drive Belts
Cable Safety:	Buckle Protection	Torque Control via Drill	Electronic Torque Control	Electronic Torque Control	Hydraulic Pressure Sensing	Hydraulic Pressure Sensing
Power:	110/220 VAC	Vari Speed Drill	110/220 VAC	110/220 VAC	Gas/Hydraulic	Gas/Hydraulic
Length:	4.7 in. (120 mm)	9.7 in. (246 mm)	15.3 in. (390 mm)	18.1 in. (460 mm)	24.5 in. (620 mm)	42 in. (1070 mm)
Width:	7.2 in. (184 mm)	8.1 in. (206 mm)	10.6 in. (270 mm)	11.8 in. (300 mm)	19 in. (484 mm)	27 in. (690 mm)
Height:	6.5 in. (166 mm)	8.5 in. (216 mm)	10 in. (250 mm)	10.6 in. (270 mm)	9.2 in. (233 mm)	48.5 in. (1230 mm)
Weight:	6.6 lbs. (3 kg)	12 lbs. (5.4 kg)	50.6 lbs. (23 kg)	31 lbs. (14 kg)	68 lbs. (31 kg)	155 lbs. (70 kg)

❖ 1 - 2.5 mm blown fiber requires add-on kit

❖ Micro duct (10 & 12 mm OD) requires add-on kit

❖ Airflow is duct size dependent

GMP Cable Placing Equipment

Reel Handling

We have your Reel Handling needs covered at GMP. From folding portable stands to large braked drum stands. Simplicity and long life is a GMP trademark.

Shown:

- Pole Mounted Spindles*
- Reel Buck*
- Reel Caddy*
- Braked Drum Stand*




Cable and Duct Pulling Equipment

GMP manufactures a complete line of cable pulling equipment that's both rugged and economical with most made locally in our USA factory.

Shown:

- Hydraulically Limited Cable Puller*
- Flexible Cable Pulling Grips*
- Side Winder Fiber Optic Pulling Trailer*
- Innerduct Pulling Eyes*
- Heavy Duty Pulling and Breakaway Swivels*

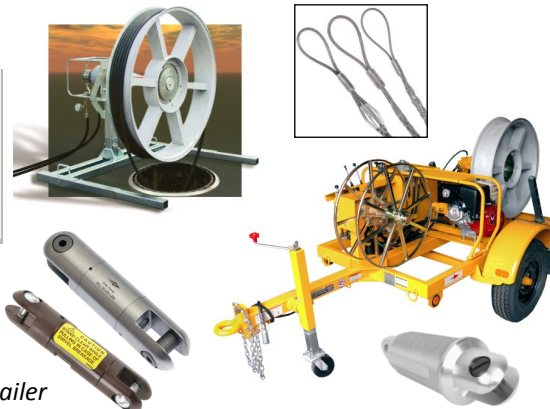


Duct Rodding

GMP produces the best performing and most durable duct rodders available anywhere - at a price that represents the very best value. Decades of in-field use have proven this high visibility, orange rod material to have the ideal combination of the mechanical properties of tensile strength, modulus, stiffness and bending behavior.

Detectable Duct Rodders available in 3/8 and 1/2" sizes.

Shown:

- Duct Rodders*
- Portable Duct Rod Pusher*
- Trailer Mounted Duct Rod Pusher*

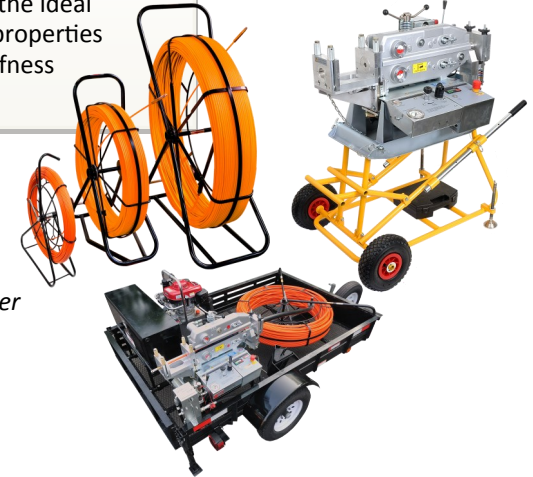

Line Blowing

We manufacture and carry a complete selection of line blowing tools and accessories to accommodate 3/4" duct to 5" conduit.

Shown:

- Seal Off Control Valve*
- innerduct Seal-offs*
- Parachute Inflatable Carriers*
- Duct Projectiles*
- Missile Line Carriers*
- Foam Line Carriers*

